

Fig. 1


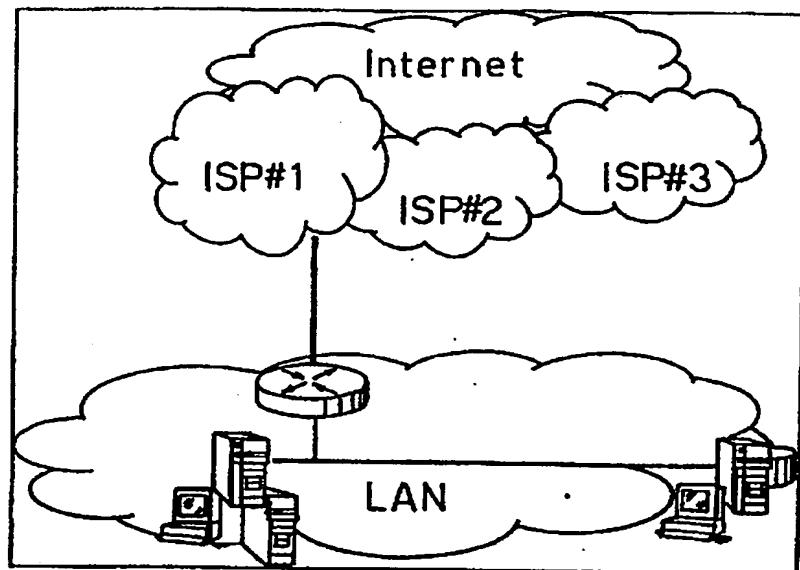


Fig. 2

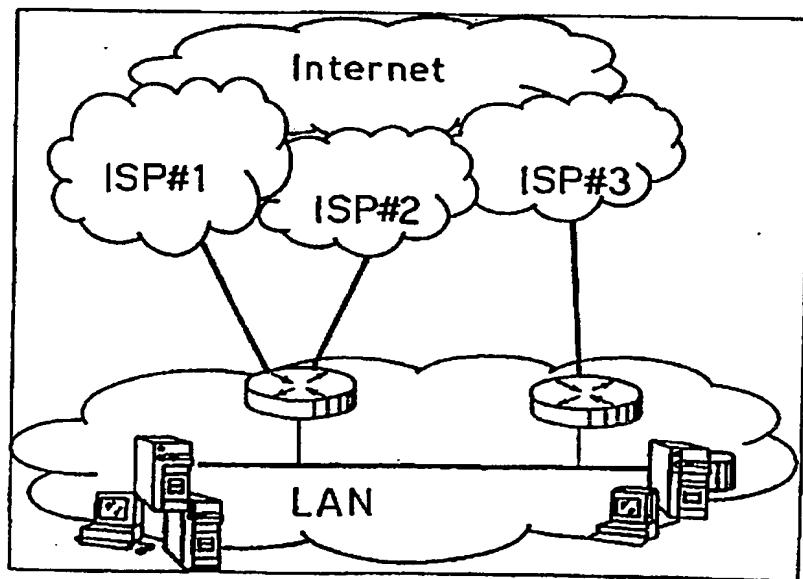

BEST AVAILABLE COPY

2/5

Fig -3


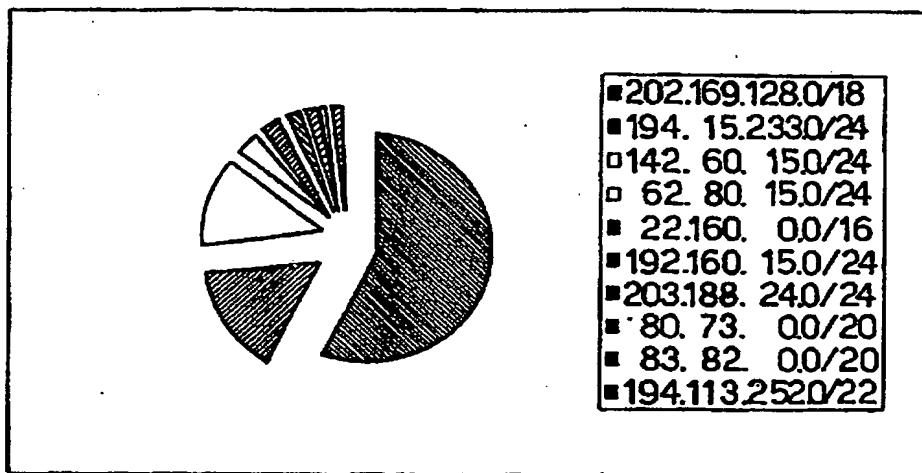


Fig -4

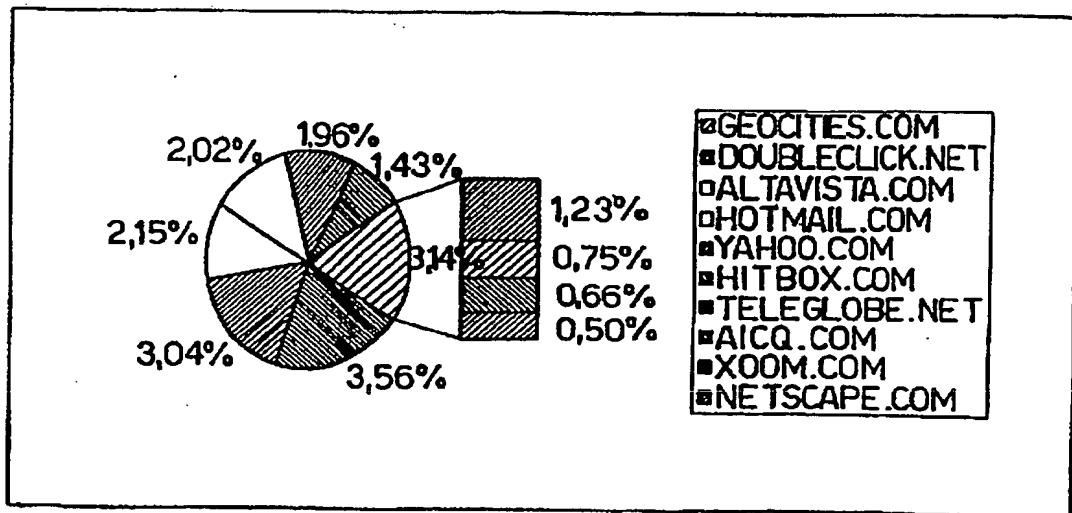

BEST AVAILABLE COPY

Fig. 5


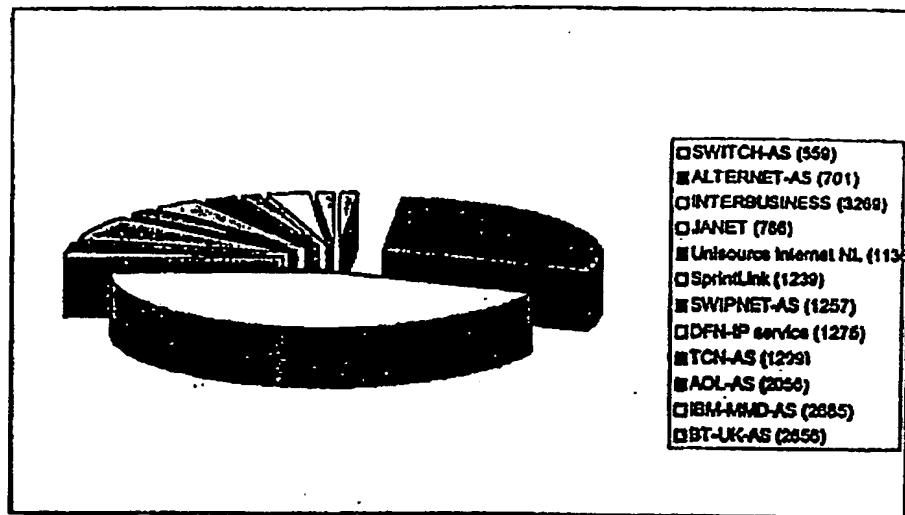


Fig. 6

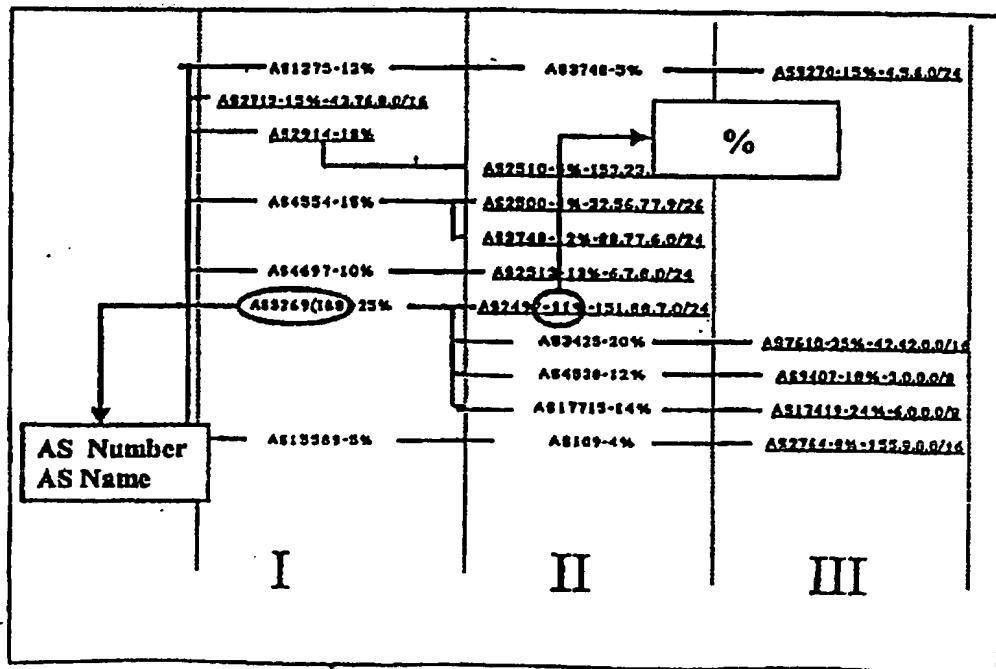


BEST AVAILABLE COPY

Fig. 7

| AS | MSEC | SALTI (HOP) |
|---------|---------|-------------|
| AS5647 | 33msec | 4 |
| AS 4536 | 128msec | 5 |
| AS 4832 | 45msec | 12 |
| AS 2421 | 63msec | 6 |

Fig. 8

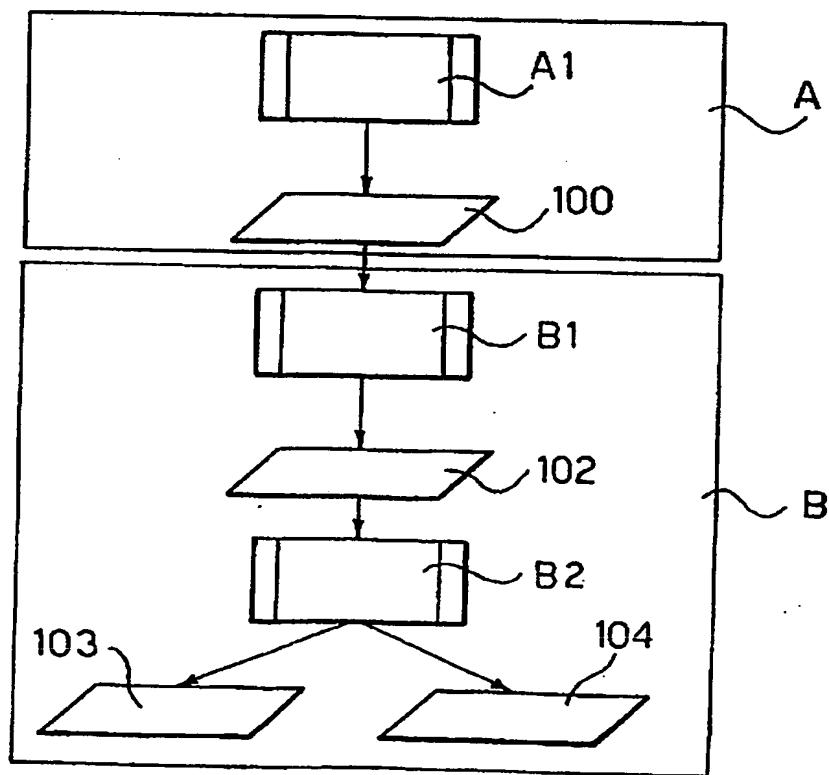

BEST AVAILABLE COPY

Fig. 9

C:/ traceroute www.cisco.com
traceroute to www.cisco.com (198.133.219.25), 30 hops max, 20 byte packets

| | | | |
|---|--------|-------|-------|
| 1 163.162.4.165 (163.162.4.165) | 2 ms | 1 ms | 1 ms |
| 2 163.162.4.158 (163.162.4.158) | 1 ms | 1 ms | 1 ms |
| 3 163.162.46.130 (163.162.46.130) | 1 ms | 1 ms | 1 ms |
| 4 radware-FP1.cselit.it (163.162.41.99) | 3 ms | 5 ms | 4 ms |
| 5 172.16.251.4 (172.16.251.4) | 4 ms * | | |
| 6 172.16.251.3 (172.16.251.3) | 3 ms | | |
| 7 radware-FP1.cselit.it (163.162.41.99) | 11 ms | 10 ms | 10 ms |
| 8 202.152.45.20 (202.152.45.20) | 3 ms | 2 ms | 1 ms |
| 9 *** | | | |

BEST AVAILABLE COPY